




NOTE THIS DRAWING IS FOR GUIDANCE ONLY AND MUST NOT BE USED AS A PROPER WORKING DRAWING.


Vertical Lift Platform Specification

- Load: 300kg / 2 persons
- Drive: Direct driven screw and nut
- Speed: 0.06m / sec
- Travel: Min 0.6m / Max 3m
- Stops: 2
- Motor: 1.1kw
- Power: 400 3ph 50Hz 10A
- Colour: RAL 7031 as standard
(alternative RAL colours available)


Building work required

- 1 - Provide power supply
- 2 - Provide upper floor adequate for fixing the guides
- 3 - Provide level surface on lower and upper level

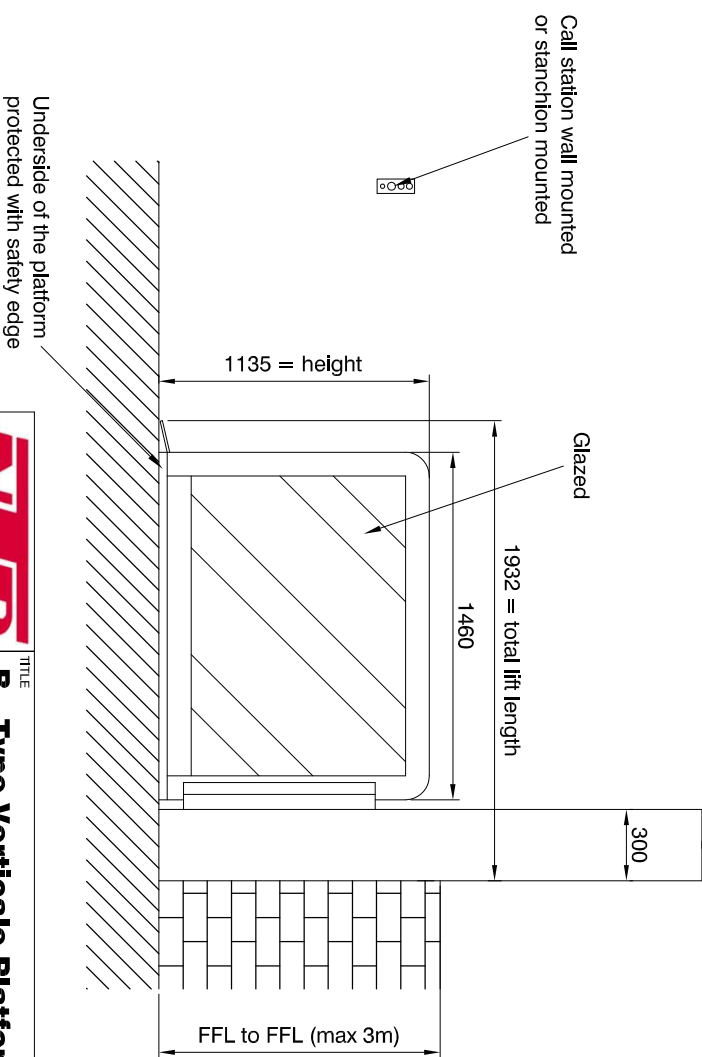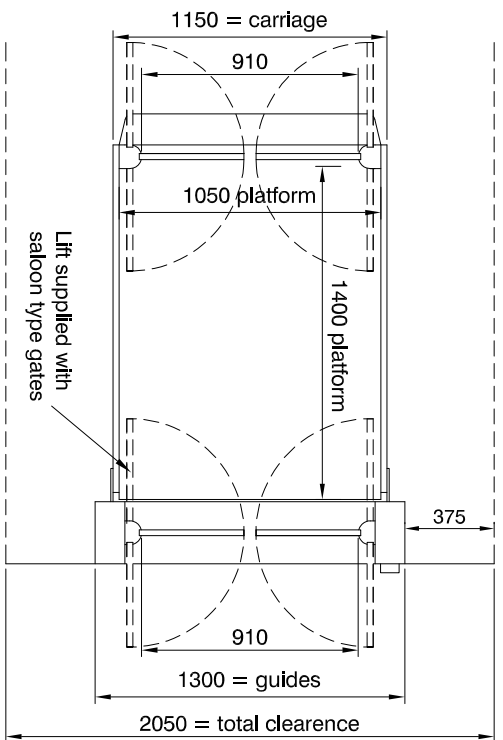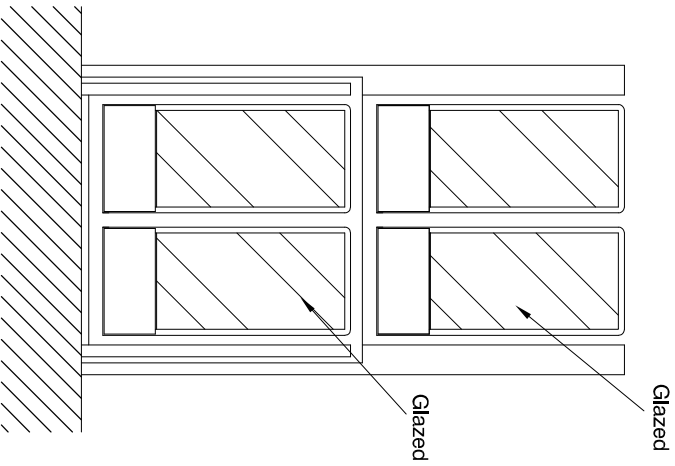

 <p>Hisvågen 3 691 37 Karlskoga, Sweden Tel. +46 (0)586-63730 Fax +46 (0)586-52140 E-mail: info@mid.se Website: www.mid.se</p>		TITLE	REV
		B - Type Vertical Platform Lift - 300kg	
DWG NO.	SCALE	DATE	DRAWN
	NTS	26/09/06	RH

NOTE THIS DRAWING IS FOR GUIDANCE ONLY AND MUST NOT BE USED AS A PROPER WORKING DRAWING.

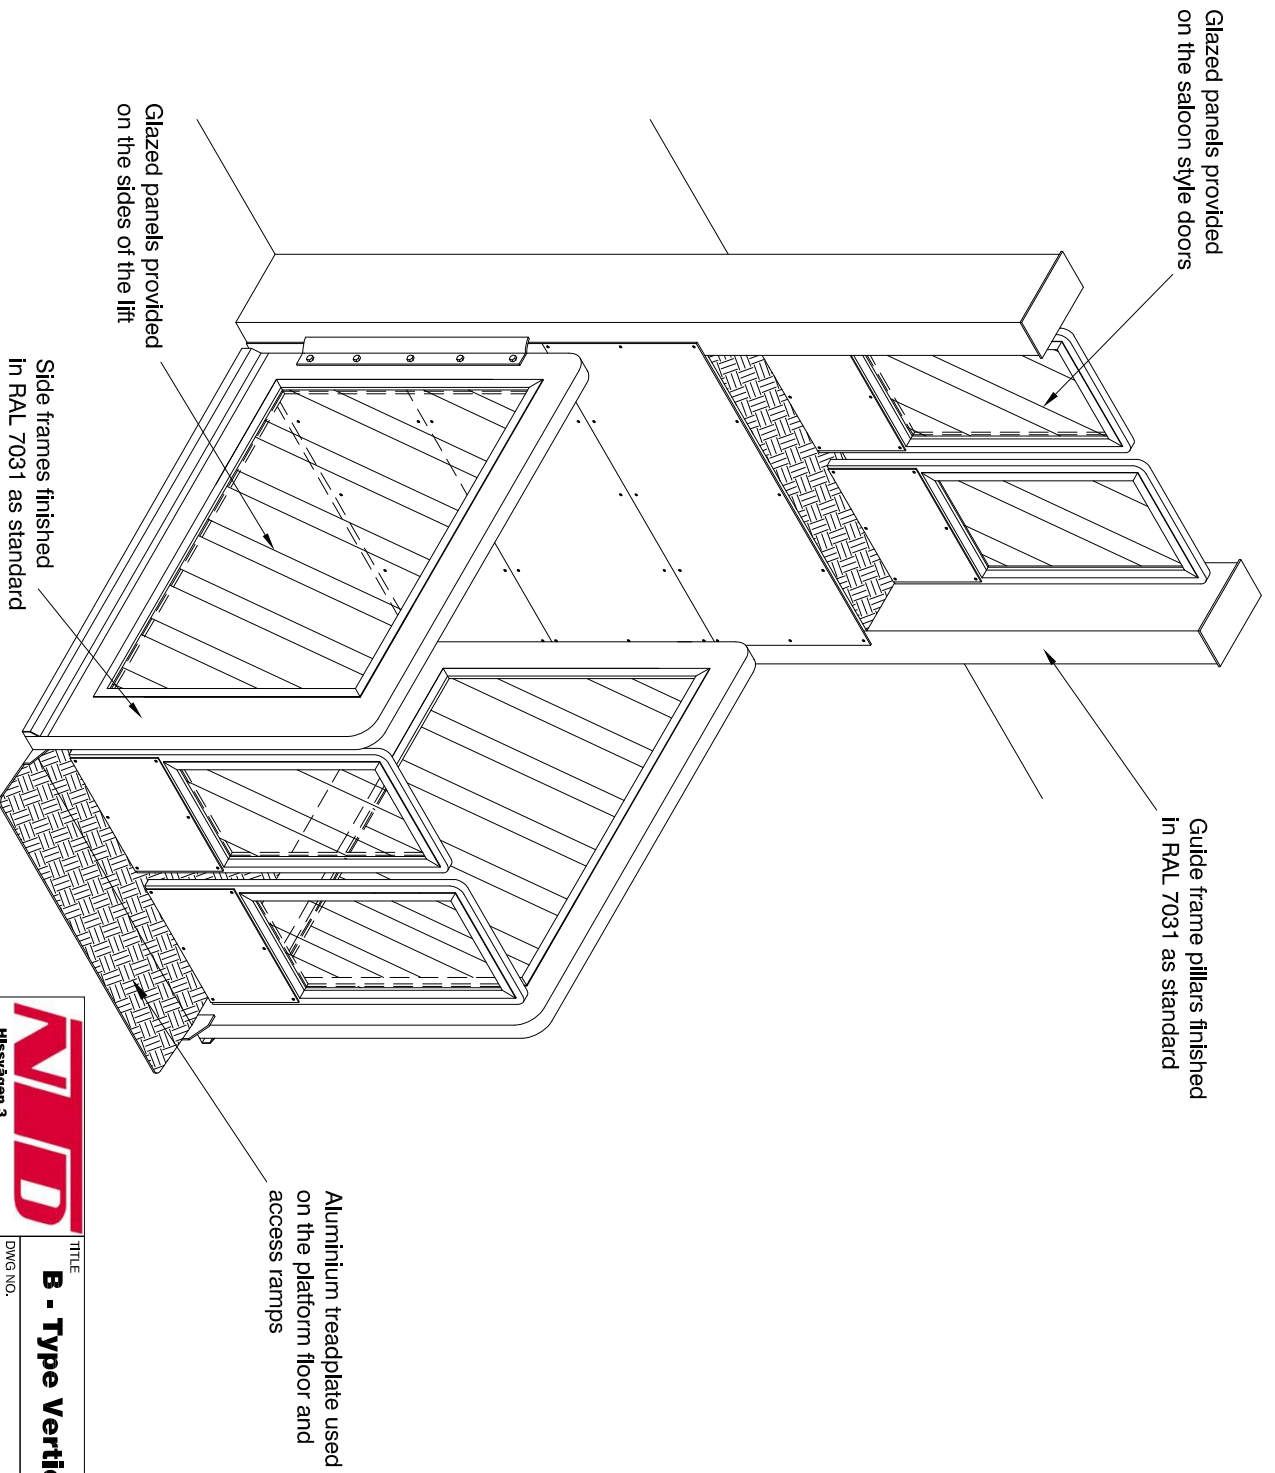

Hisvåggen 3
691 37 Karlskoga, Sweden
Tel. +46 (0)1586-63730
Fax +46 (0)1586-52140
E-mail - info@mid.se
website - www.mid.se

B - Type Vertical Platform Lift - 300kg

TITLE	REV
DWG NO. -----	A
SCALE NTS	DATE 26/09/06
DRAWN	RH