



NOTE THIS DRAWING IS FOR GUIDANCE ONLY AND MUST NOT BE USED AS A PROPER WORKING DRAWING.

Vertical Lift Platform Specification

- Load: 300kg / 2 persons
- Drive: Direct driven screw and nut
- Speed: 0.06m / sec
- Travel: Min 0.6m / Max 3m
- Stops: 2
- Motor: 1.1kw
- Power: 400v 3ph 50Hz 10A
- Colour: RAL 7031 as standard
(alternative RAL colours available)

Building work required

- 1 - Provide power supply
- 2 - Provide upper floor adequate for fixing the guides
- 3 - Provide level surface on lower and upper level

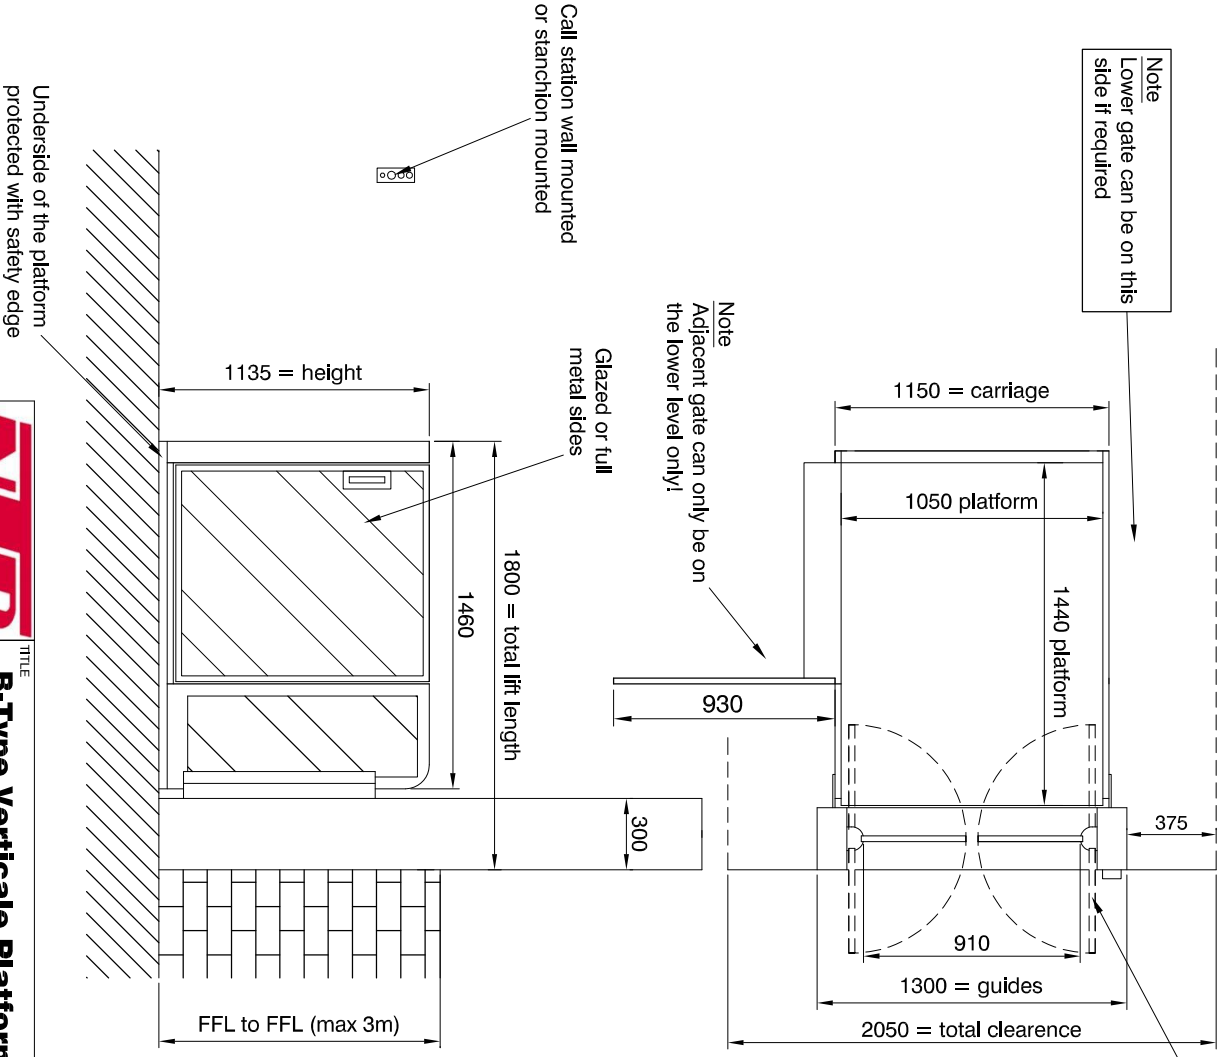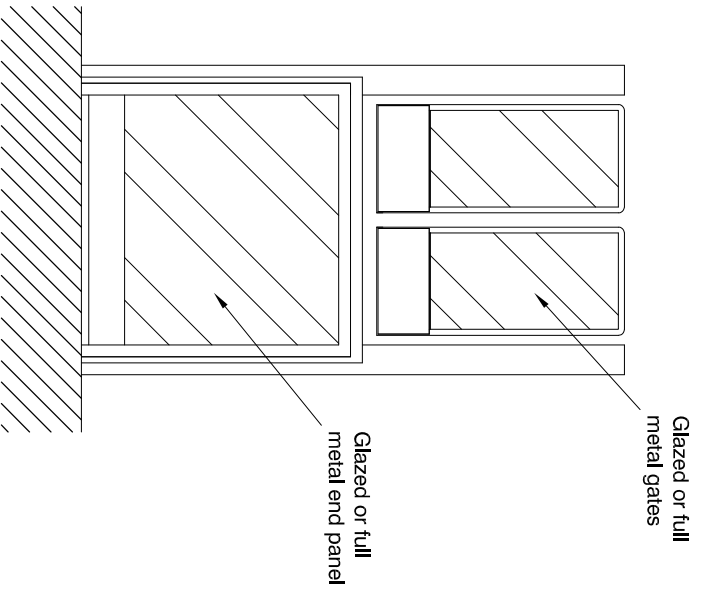

MID

Hissvägen 3
691 37 Karlskoga, Sweden
Tel. +46 (0)586-63730
Fax +46 (0)586-52140
E-mail - info@mid.se
website - www.mid.se


B-Type Vertical Platform Lift - 300kg

DWG NO. _____

SCALE NTS DATE 26/09/06 DRAWN RH

REV A

NOTE THIS DRAWING IS FOR GUIDANCE ONLY AND MUST NOT BE USED AS A PROPER WORKING DRAWING.

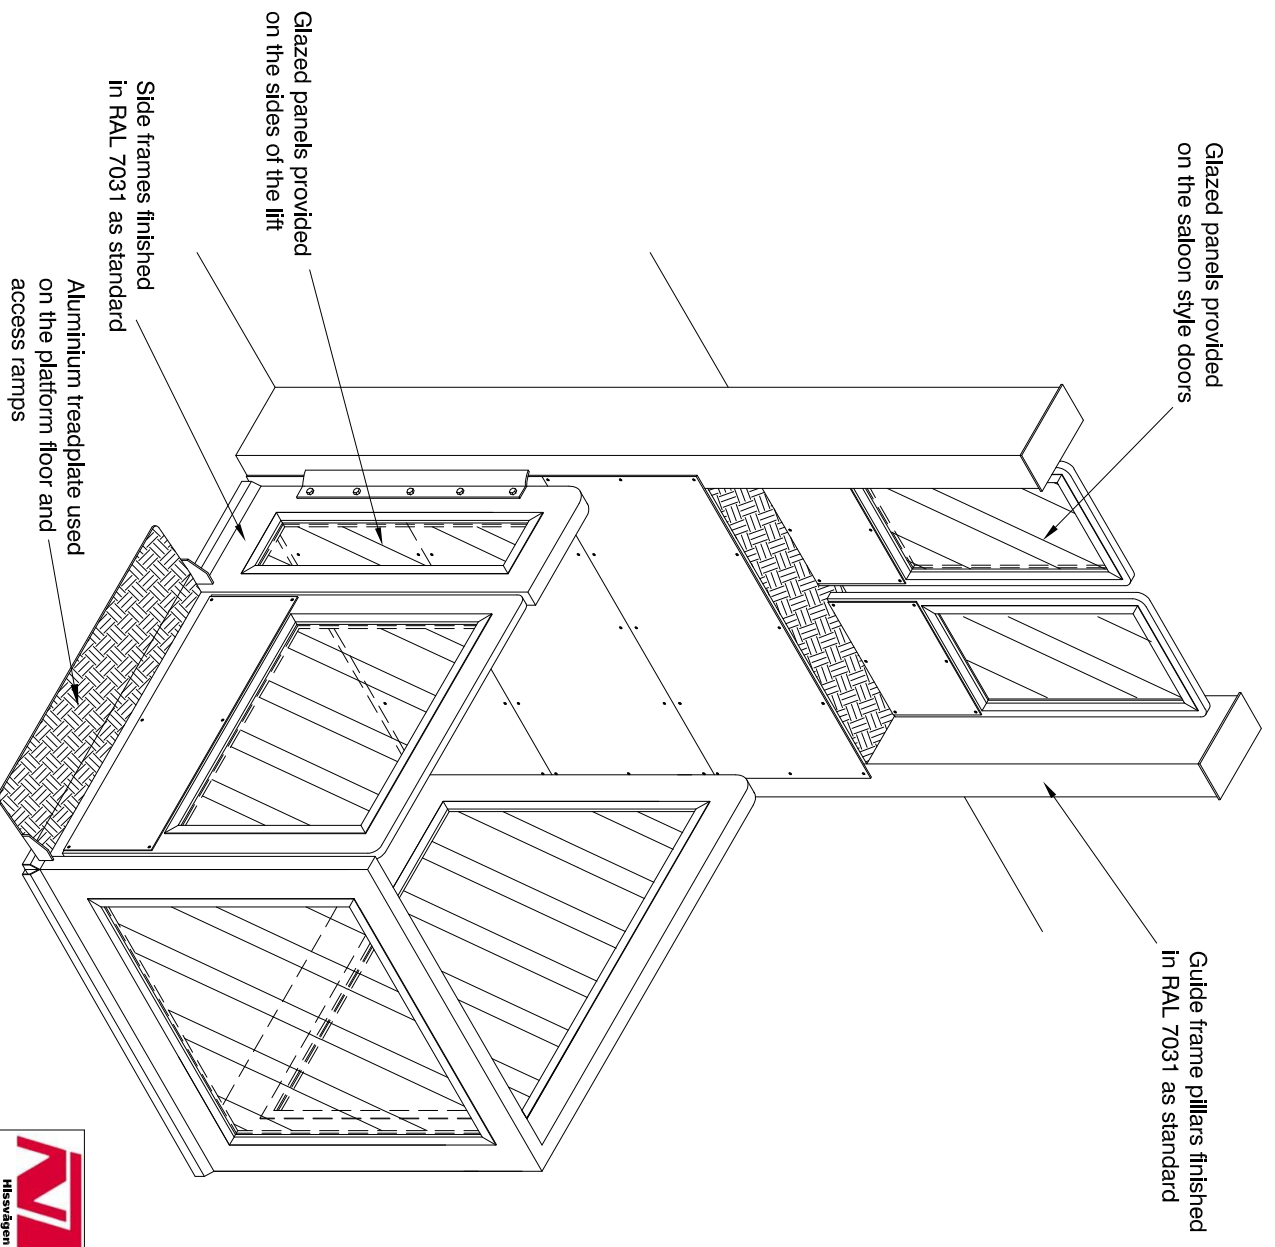

Hissnäsgränd 3
691 37 Karlskoga,
Sweden
Tel - +46 (0)586-63730
Fax - +46 (0)586-52140
E-mail - info@mid.se
Website - www.mid.se

TITLE		REV
B - Type Vertical Platform Lift - 300 kg		A
DWG NO.	-----	
SCALE	NTS	DATE
		26/09/06
		DRAWN
		RH